

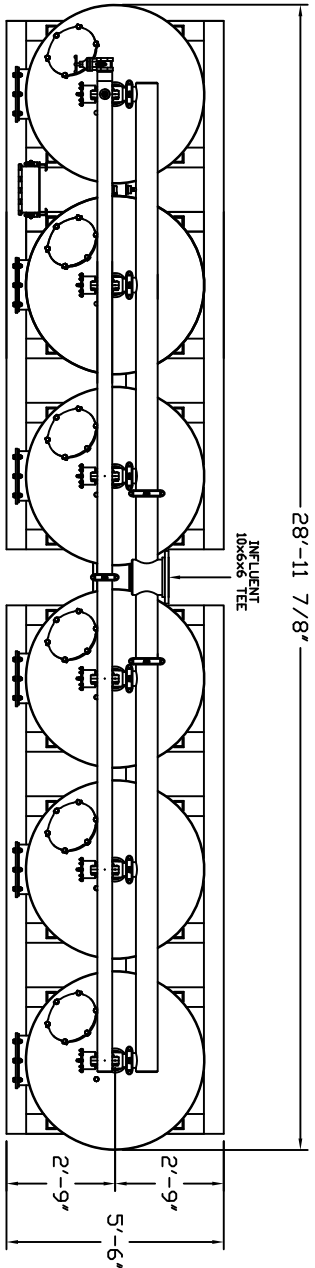
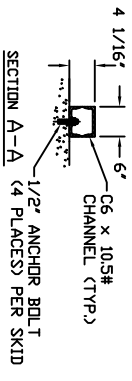


GAC 5472-6A

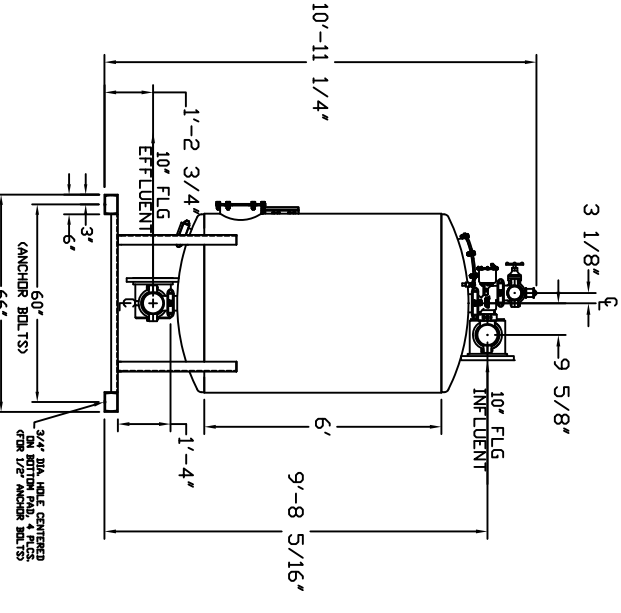

- NOTES:
1. FLOW RATE DESIGN: 480-960 GPM, MAX TD 1800 GPM, BACKWASH RATE: 10 GPM/FT².
 2. MAXIMUM WORKING PRESSURE: 80 PSI.
 3. ELECTRICAL REQUIREMENTS:
 - CONTROLLER (24V),
 - SOLENOIDS (24VAC), FACTORY WIRED
 4. AIR SUPPLY REQUIRED: 2 CFM @ 70 PSIG (MIN.).
 5. MEDIA REQUIREMENT PER TANK:
 - A. 1/2"x3/4" CRUSHED ROCK: 9.5 CU. FT., 635 CU. FT.,
 - B. GRANULAR ACTIVATED CARBON:
 6. WEIGHTS: (APPROX.)
 - EQUIPMENT: 8,690 LBS (LESS MEDIA)
 - MEDIA: 16,479 LBS
 - OPERATION: 50,200 LBS

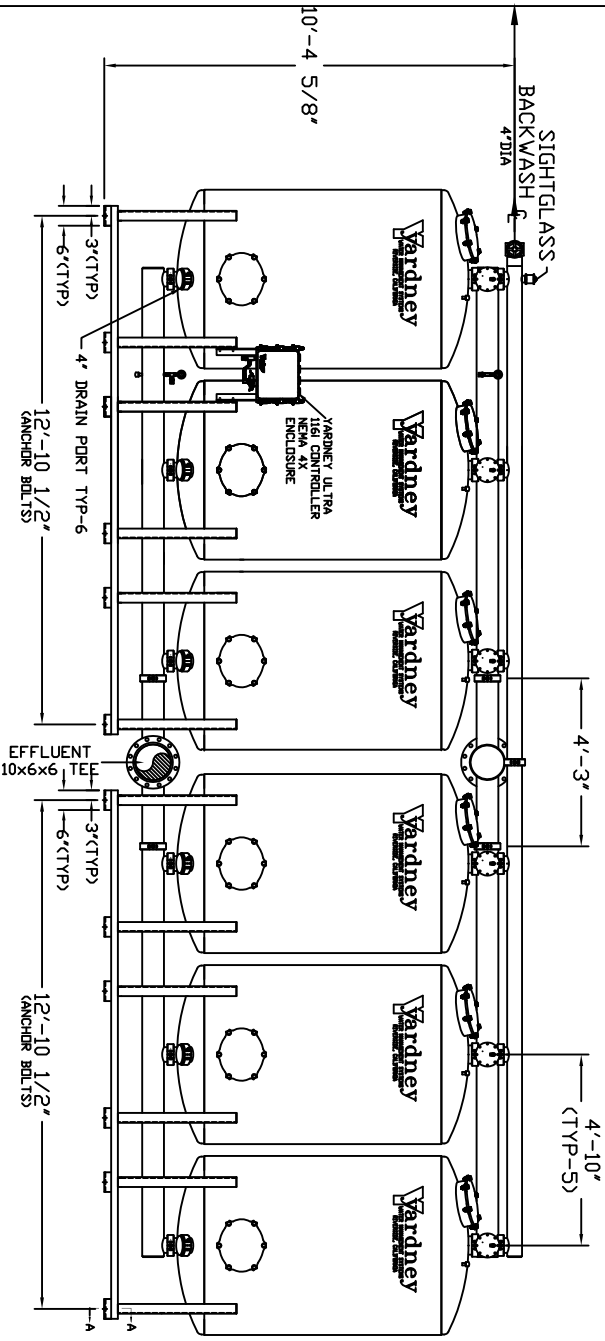

THIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS THE PROPERTY OF YARDNEY WATER MANAGEMENT, INC. IT IS TO BE USED ONLY IN CONNECTION WITH THE PROJECT AND FOR THE PURPOSES SPECIFIED HEREIN. ANY OTHER REUSE OR REPRODUCTION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF YARDNEY WATER MANAGEMENT SYSTEMS, 1994.	
APPROVED DATE:	APPROVED BY:
DATE:	PROJECT NO.:
SHEET NO.:	TOTAL SHEETS:
YARDNEY WATER MANAGEMENT SYSTEMS, 1994	GAC 5472-6A FILTER SYSTEM
3/4\"/>	1\"/>