
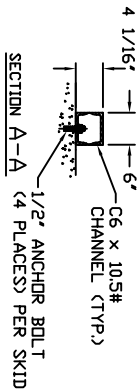
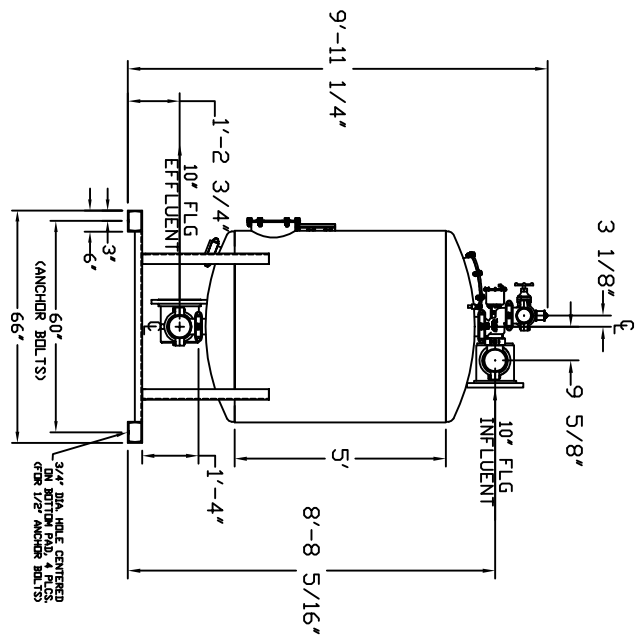
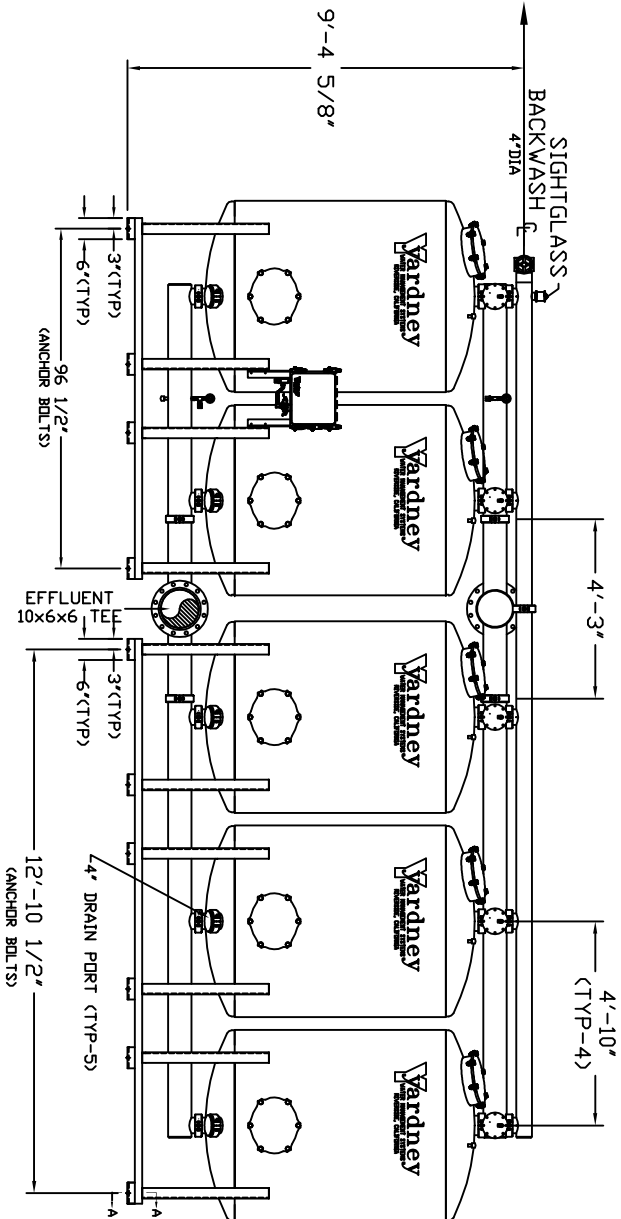


MM 5460-5A

NOTES:

1. FLOW RATE DESIGN: 400-1193 GPM, MAX. TD 1590 GPM.
2. MAXIMUM WORKING PRESSURE: 80 PSI.
3. ELECTRICAL REQUIREMENTS:
CONTROLLER 120V,
SOLENOIDS 24VAC, FACTORY WIRED
4. AIR SUPPLY REQUIRED: 2 CFM @ 70 PSIG (MIN.).
5. MEDIA REQUIREMENT PER TANK:
 - A) 1/2" x 3/4" CRUSHED ROCK: 95 CU. FT.
 - B) COARSE GARNET: 80 CU. FT.
 - C) FINE GARNET: 240 CU. FT.
 - D) ANTHRACITE: 240 CU. FT.
6. WEIGHTS: (APPROX.)
EQUIPMENT: 6,940 LBS (LESS MEDIA)
MEDIA: 31,740 LBS
OPERATION: 57,200 LBS

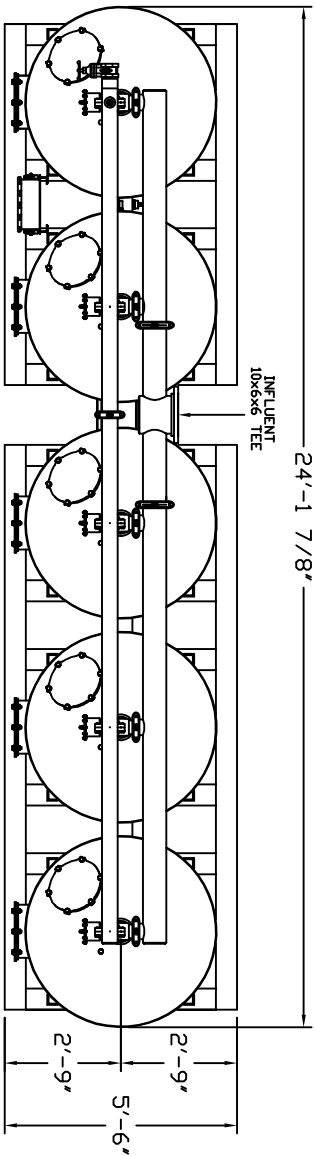

		MM 5460-5A FILTER SYSTEM
REVISION NO.	DATE	BY
1 2 3 4 5	10-08 10-08 10-08 10-08 10-08	SYSTEMVHM