

RF MAXI-F


NOTES


- DESIGN FLOW RATE: 2500 GPM (MAX.)

- 2. OPERATING PRESSURE: 150 PSI (MAX.)
 3. CARTRIDGE:
 42" MIN. CLEARANCE REQUIRED FOR CARTRIDGE REPLACEMENT.



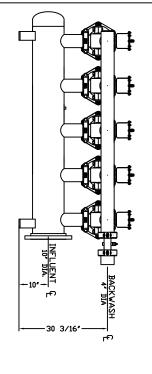








LEFT

END VIEW



_	_	_	_	_	_		
Ë	>	В			MAN	HEART	
REVISIONS	CARTRIDGE 40 TO 42 PER CART. IN SEAL I	ADDED 1/2" WELD TABS			HIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS CON- FIDENTIAL, PROPRETARY, AND IS THE PROPRETY OF VARINARY VATER MANAGEMENT, INC. IT IS SUBMITTED DNLY IN CONNECTION WITH THE TRANSACTION OF CHICK IT PERTAINS AND MIST MIST BE USED IN ANY COMPACTEMENT. THE DRAWING IS NOT TO BE COPIED VARDNEY VATER MANAGEMENT. THE DRAWING IS NOT TO BE COPIED AND MUST BE RETURNED UPON REQUEST. COPYRIGHT YARDNEY VATER MANAGEMENT SYSTEMS, 1994.		
ΒY	тс)TO				NEW YORK THE STREET OF THE STR	
DATE	6-04	10-12				S CON-	
APP	APP	APP				~6·1 2~1	
BY DATE APP USED DN	DTC 6-04 APP SCALE	DTO 10-12 APP APPROVED BY:	CHECKED BY:	DRAWN BY: JDB 4/18/94	APPROVALS DATE		
SCALE	SIZI -		ϗ				
E DVG DORSYSTEM\MFS\GMFS SHEET 1 DF 1	- SUGUITUUUJ B	SIZE DRAWING NO COOL 1 COOL REVI	APPROVALS DATE MAXI-FLUSH SCREEN FILTER WAS DIV. DB 4/19/94 MF S 10-5A		1	Vardney Vare namazien system	