
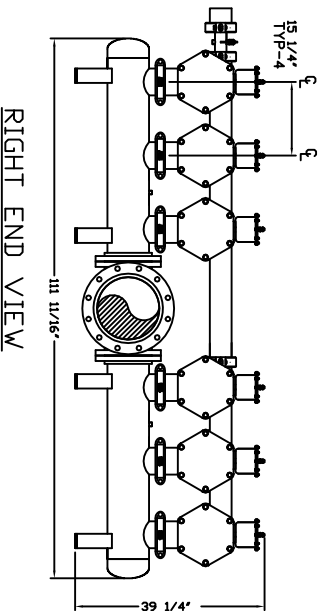
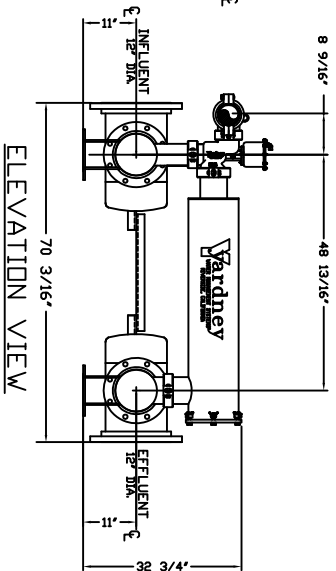
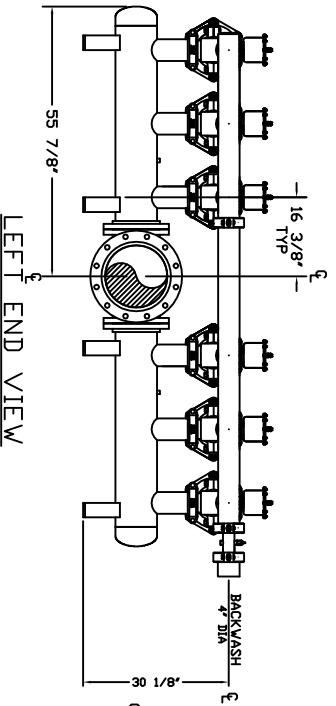


GOLF/TURF MAXI-FLUSH 10-6A CENTERFEED

NOTES:

1. DESIGN FLOW RATE: 3000 GPM (MAX.)
2. OPERATING PRESSURE: 150 PSI (MAX.)
3. CARTRIDGE:
42" MIN. CLEARANCE REQUIRED FOR
CARTRIDGE REPLACEMENT.

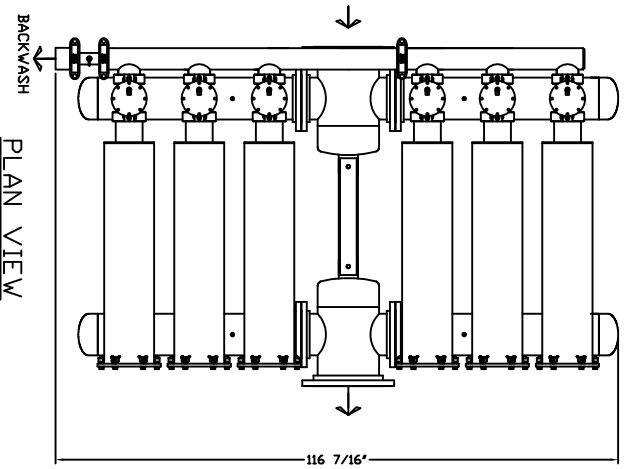

THIS DRAWING INCLUDING THE INFORMATION IT CONTAINS IS THE
 PROPRIETARY PROPERTY OF YARDNEY WATER MANAGEMENT, INC. IT IS
 SUBMITTED ONLY IN CONNECTION WITH THE TRANSACTION TO WHICH IT
 PERTAINS AND MUST NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY
 ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING,
 AND MUST BE RETURNED UPON REQUEST. COPYRIGHT YARDNEY WATER
 MANAGEMENT SYSTEMS, 1994.

NO.	REVISION	BY	DATE	DESCRIPTION
A	CARTRIDGE 40 TO 42 PER CART. IN SEAL	DTC	1-11	
B	CHG 8"VIC CONNECTIONS TO FLG	DTC	6-04	
C	ADDED 1/2" WELD TABS	DTC	10-12	

DATE: 1-19-2001
 DRAWING NO: 9080110006
 LOCATION: SYSTEM/MFS/CENTERFEED



MFS10-6A
 SCREENFILTER