
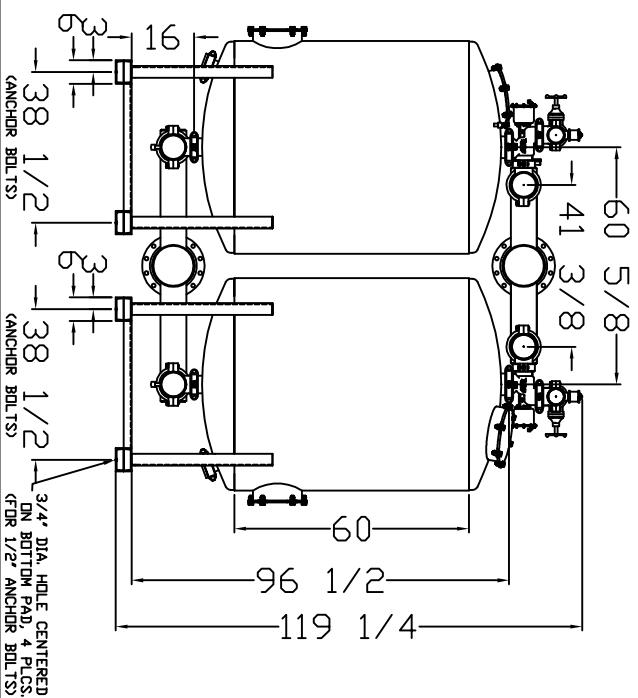
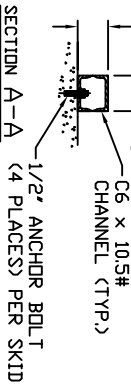
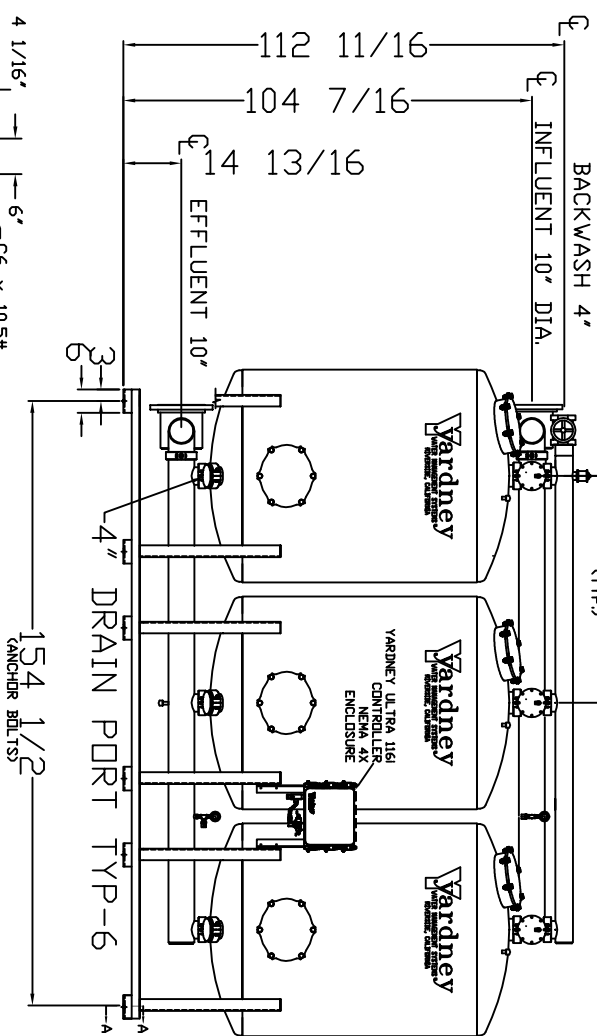


MM 5460-6A

NOTES:

1. FLOW RATE DESIGN: 480-1432 GPM, MAX. TD 1908 GPM.
- BACKWASH RATE: 15 GPM/FT².
2. MAXIMUM WORKING PRESSURE: 80 PSI.
3. ELECTRICAL REQUIREMENTS:
CONTROLLER 120V,
SOLENOIDS 24VAC, FACTORY WIRED
4. AIR SUPPLY REQUIRED: 2 CFM @ 70 PSIG (MIN.).
5. MEDIA REQUIREMENT PER TANK:
A. 1/2"x3/4" CRUSHED ROCK: 9.5 CU. FT.
B. 1.45mm GARNET: 8.0 CU. FT.
C. 0.35mm GARNET: 24 CU. FT.
B. 0.75 - 0.90mm ANTHRACITE: 24 CU. FT.

6. WEIGHTS: (APPROX)
EQUIPMENT: 8,320 LBS (LESS MEDIA)
MEDIA: 38,088 LBS
OPERATION: 68,650 LBS

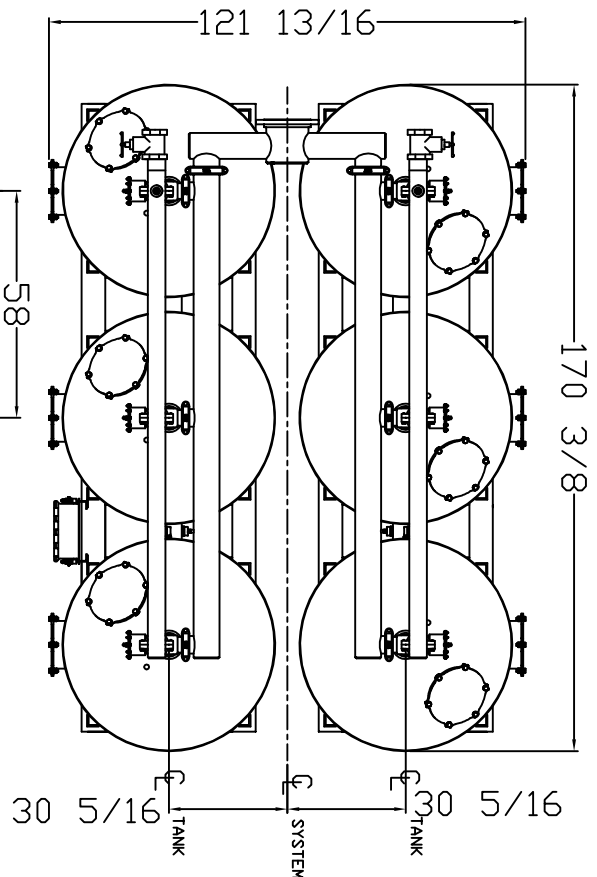

<p>THIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS CONFIDENTIAL PROPERTY OF YARDNEY WATER MANAGEMENT SYSTEMS. IT IS TO BE USED ONLY IN CONNECTION WITH THE TRANSACTION TO WHICH IT PERTAINS AND MUST NOT BE USED IN ANY OTHER MANNER. DESTRUCTION OF THIS DRAWING AND MUST BE RETURNED UPON REQUEST. COPYRIGHT YARDNEY WATER MANAGEMENT SYSTEMS, 1993</p>		<p>APPROVALS DATE</p>	
C	ADDED 4" DRAIN PORT	DDO 3-10	APP
B	FLANGE IN/OUT WAS BRAUN & CORRECTED	DDO 8-09	APP
A	STANDARDIZED SKID	DDO 10-07	APP
SYM	REVISIONS	BY DATE	APP

<p>Yardney WATER MANAGEMENT SYSTEMS</p>		MM 5460-6A
<p>U-PATTERN</p>		9500546016
SIZE	DRAWING NO.	REV
D		C