


MM 5460-8AS BLOCK PATTERN



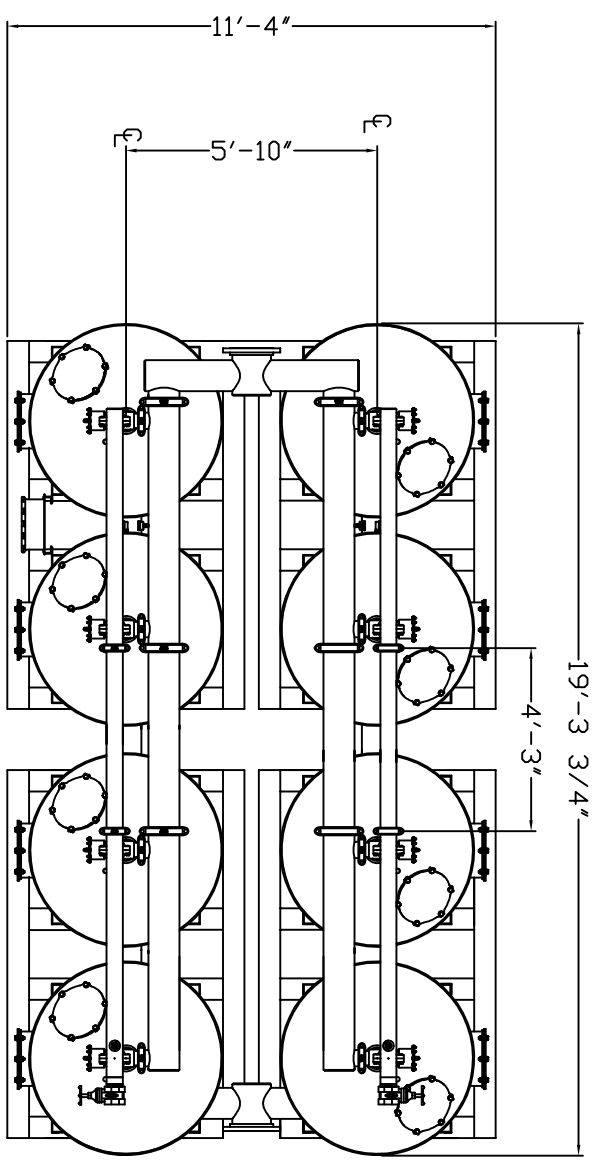


NOTES:

1. FLOW RATE DESIGN: 640-1910 GPM. MAX. TO 2544 GPM. BACKWASH RATE: 15 GPM/FT².
2. MAXIMUM WORKING PRESSURE: 80 PSI.
3. ELECTRICAL REQUIREMENTS:
CONTROLLER 120V;
SOLENOIDS 24VAC; FACTORY WIRED
4. AIR SUPPLY REQUIRED: 2 CFM @ 70 PSIG (MIN.).
5. MEDIA REQUIREMENT PER TANK:

A. 1/2"x3/4" CRUSHED ROCK:	9.5 CU. FT.
B. 145mm GARNET:	80 CU. FT.
C. 0.35mm GARNET:	24 CU. FT.
B. 0.75 - 0.90mm ANTHRACITE:	24 CU. FT.
6. WEIGHTS: (APPROX.)

EQUIPMENT:	14,000 LBS (LESS MEDIA)
MEDIA:	51,000 LBS
OPERATION:	95,000 LBS

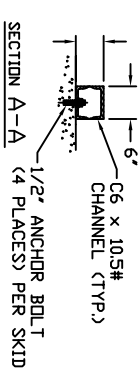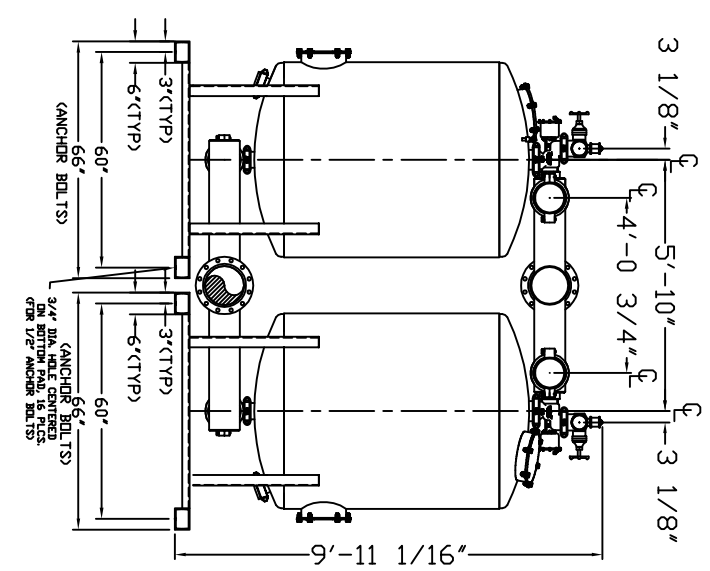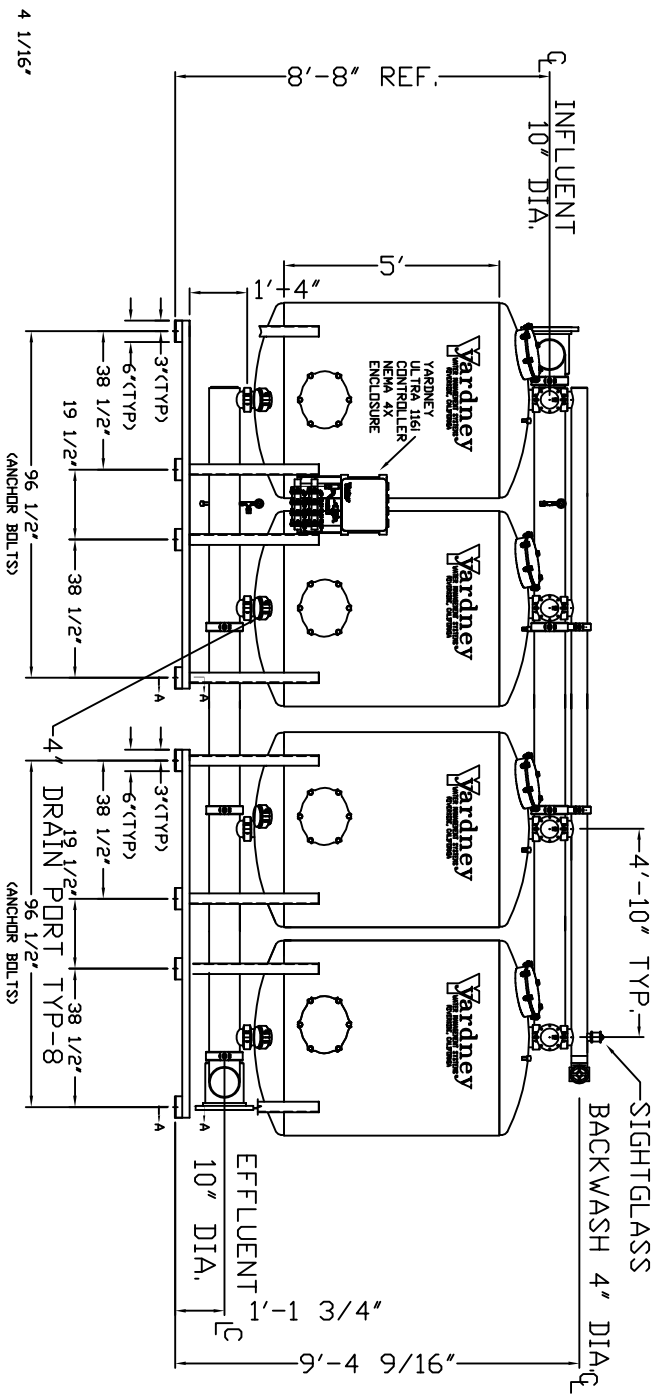

THIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS THE PROPERTY OF YARDNEY WATER MANAGEMENT SYSTEMS, INC. IT IS SUPPLIED ONLY IN CONNECTION WITH THE EQUIPMENT AND SERVICES DESCRIBED HEREON AND IS NOT TO BE REPRODUCED OR USED IN ANY OTHER MANNER WITHOUT THE WRITTEN PERMISSION OF YARDNEY WATER MANAGEMENT SYSTEMS, INC. IT MUST BE RETURNED TO THE ORIGINAL ISSUING OFFICE UPON REQUEST. COPYRIGHT YARDNEY WATER MANAGEMENT SYSTEMS, 1993		APPROVALS DATE DRAWN BY: JMD CHECKED BY: JMD DESIGNED BY: JMD PROJECT NO.: 19750000	
DO NOT SCALE DWG		MODEL MM 5460-8AS BLOCK PATTERN	
SIZE: 19750000		REV: 1	
BY: JMD DATE: 10/15/93		SPECIAL: 1	
REVISIONS		SPEC: 1	

