


SM 4816-5A




NOTES:

1. FLOW RATE DESIGN: 1,063-1,563 GPM.

UPPER (INLET) MANIFOLD LAYOUT



LOWER (OUTLET) MANIFOLD LAYOUT

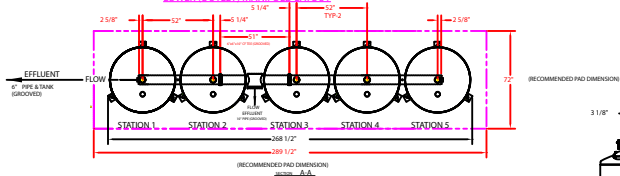

THIS DRAWING, INCLUDING THE INFORMATION CONTAINED HEREON, IS THE PROPERTY OF YARDNEY AND COMPANY, INC. IT IS HEREBY CERTIFIED THAT THE INFORMATION CONTAINED HEREON IS THE PROPERTY OF YARDNEY AND COMPANY, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF YARDNEY AND COMPANY, INC. THE DRAWING IS NOT TO BE LOANED, REPRODUCED, COPIED, OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF YARDNEY AND COMPANY, INC.

NO.	DESCRIPTION	DATE	BY	CHKD.
1	DESIGN			
2	REVISED			
3	REVISED			
4	REVISED			
5	REVISED			
6	REVISED			
7	REVISED			
8	REVISED			
9	REVISED			
10	REVISED			

DO NOT SCALE DWG.

Yardney DO NOT SCALE DWG.

DESIGN DIVISION

SM 4816-5A

INTER-FEED LAYOUT

NO.	DESCRIPTION	DATE	BY	CHKD.
1	DESIGN			
2	REVISED			
3	REVISED			
4	REVISED			
5	REVISED			
6	REVISED			
7	REVISED			
8	REVISED			
9	REVISED			
10	REVISED			

PROJECT NO. 9000481605

DATE 11/11/16

SCALE 1" = 1'-0"