

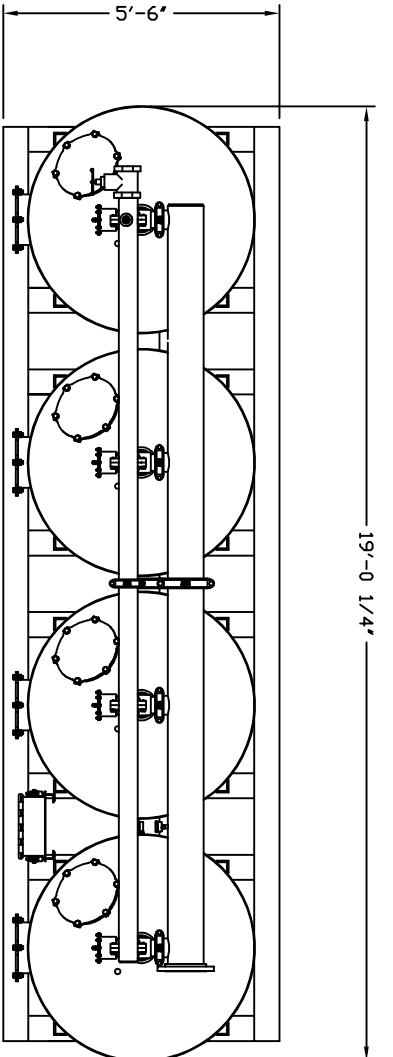


GAC 5472-4A

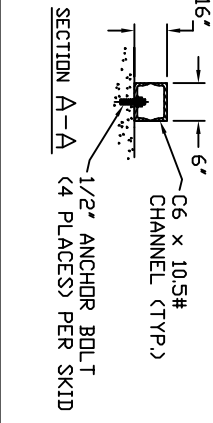

- NOTES:**
1. FLOW RATE DESIGN: 320-640 GPM, MAX TD 1,200 GPM.
 2. MAXIMUM WORKING PRESSURE: 80 PSI.
 3. ELECTRICAL REQUIREMENTS:
 - CONTROLLED 120V/
 - SOLENOIDS 24VAC, FACTORY WIRED
 4. AIR SUPPLY REQUIRED: 2 CFM @ 70 PSIG (MIN).
 5. MEDIA REQUIREMENT PER TANK:
 - A. 1/2"x3/4" CRUSHED ROCK: 9.5 CU. FT.
 - B. GRANULAR ACTIVATED CARBON: 63.5 CU. FT.
 6. WEIGHTS: (APPROX)
 - EQUIPMENT: 5,970 LBS (LESS MEDIA)
 - MEDIA: 11,191 LBS
 - OPERATION: 35,650 LBS

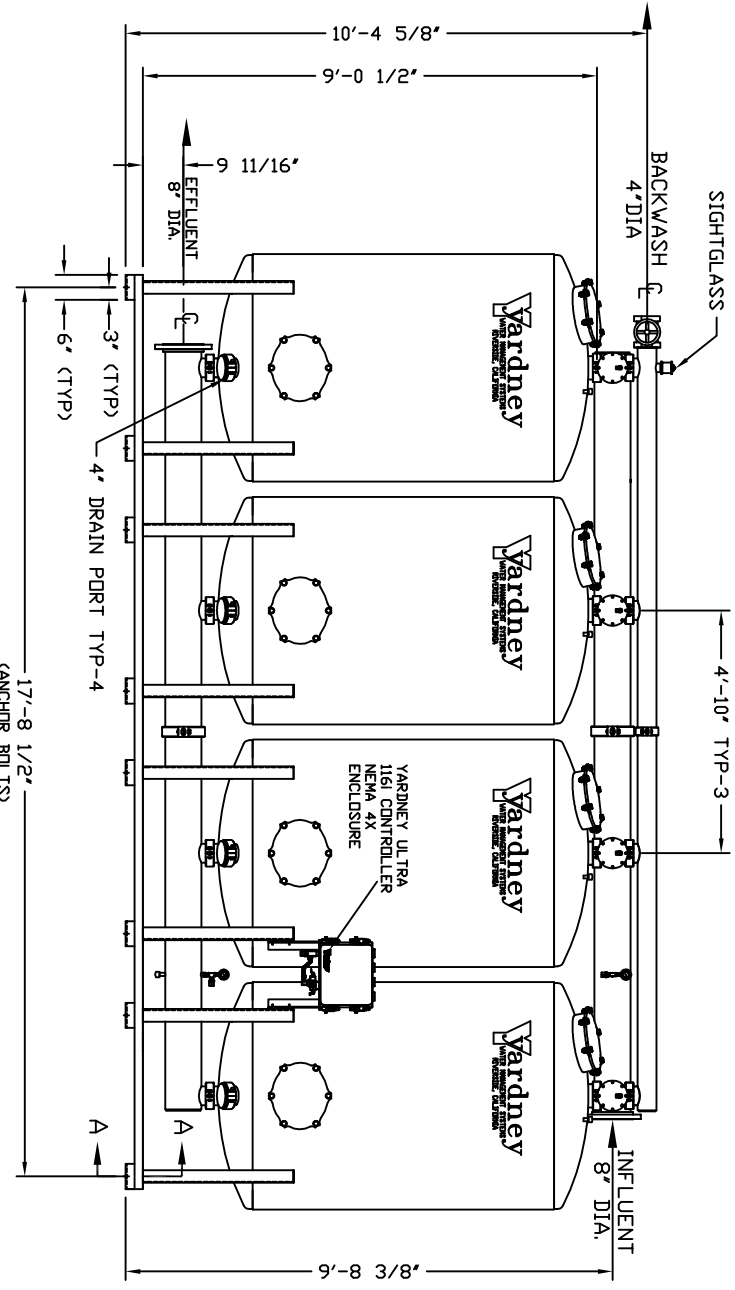

THIS DRAWING, INCLUDING THE INFORMATION IT CONTAINS, IS CONFIDENTIAL PROPERTY OF YARDNEY WATER MANAGEMENT SYSTEMS, INC. IT IS SUBMITTED ONLY IN CONNECTION WITH THE TRANSACTION TO WHICH IT PERTAINS AND MUST NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF YARDNEY WATER MANAGEMENT SYSTEMS, INC.

REV	DATE	BY	APP	DESCRIPTION
A	10-05	APP	APP	CONNECTED OWN FLOW METER
B	10-05	APP	APP	STANDARDIZED NOTES
C	10-05	APP	APP	UPDATED SKID TO STD DESIGN
D	11-09	APP	APP	ADDED SKID TO STD DESIGN
E	11-09	APP	APP	NOTES & FROM PART

DO NOT SCALE DRAWING

Yardney WATER MANAGEMENT SYSTEMS
RIVERVIEW, CALIFORNIA

GAC 5472-4A
FILTER SYSTEM

SIZE: 9500547204

SCALE: 1" = 1'

